
The Basin of Mexico aquifer system: regional groundwater level dynamics and database development

J. J. Carrera-Hernández · S. J. Gaskin

Abstract The aquifer system of the Basin of Mexico is the main source of water supply to the Mexico City Metropolitan Zone. Management of the Basin's water resources requires improved understanding of regional groundwater flow patterns, for which large amounts of data are required. The current study analyses the regional dynamics of the potentiometric groundwater level using a new database called the Basin of Mexico Hydrogeological Database (BMHDB). To foster the development of a regional view of the aquifer system, data on climatological, borehole and runoff variables are part of the BMHDB. The structure and development of the BMHDB are briefly explained and then the database is used to analyze the consequences of groundwater extraction on the aquifer's confinement conditions using lithology data. The regional analysis shows that the largest drawdown rates are located north of Mexico City, in Ecatepec (a region that has not yet received attention in hydrogeological studies), due to wells that were drilled as a temporary solution to Mexico City's water-supply problem. It is evident that the aquifer has changed from a confined to an unconfined condition in some areas, a factor that is responsible for the large subsidence rates (40cm/year) in some regions.

Résumé Le système aquifère du Bassin de Mexico est la principale source d'approvisionnement en eau de la Zone Métropolitaine de Mexico. La gestion des ressources en eau du Bassin nécessite une compréhension améliorée du schéma régional d'écoulement de l'eau souterraine, compréhension pour laquelle une importante quantité de

données est requise. La présente étude analyse la dynamique régionale du niveau potentiométrique de l'eau souterraine via une base de données appelée Base de Données Hydrogéologiques du Bassin de Mexico (BMHDB en anglais). Pour encourager le développement d'une vision régionale du système aquifère, des données sur les variables du climat, des puits et du ruissellement ont été intégrées dans la BMHDB. La structure et le développement de la BMHDB sont brièvement expliqués, avant d'utiliser la base de données pour analyser les conséquences de l'exploitation de l'eau souterraine sur les conditions de captivité de l'aquifère en utilisant les données lithologiques. L'analyse régionale montre que les taux de rabattement les plus importants sont localisés au Nord de la ville de Mexico, à Ecatepec (une région qui n'a pas encore fait l'objet d'études hydrogéologiques particulières), du fait de puits qui avaient été forés pour résoudre temporairement le problème de l'approvisionnement en eau de Mexico. Il est évident que l'aquifère est passé de conditions captives à des conditions libres dans certaines zones, un fait qui est responsable de l'effondrement des terrains (40cm/an) dans certaines régions.

Resumen El sistema acuífero de la Cuenca de México es la fuente principal de agua para la Zona Metropolitana de la Ciudad de México. El manejo de los recursos hidráulicos en la Cuenca requiere mejorar el entendimiento de los patrones regionales de flujo de agua subterránea, para lo cual se requiere una gran cantidad de información. El presente estudio analiza la dinámica regional del nivel potenciométrico del agua subterránea usando una nueva base de datos llamada Base de Datos Hidrogeológicos de la Cuenca de México. Para fomentar el desarrollo de estudios regionales del sistema acuífero, esta base de datos contiene registros climatológicos, de pozos y de escurrimiento. La estructura y desarrollo de esta base de datos son brevemente explicados y posteriormente es utilizada para analizar las consecuencias que la extracción de agua subterránea ha tenido en las condiciones de confinamiento del acuífero utilizando datos litológicos. El analisis regional muestra que las mayores tasas de abatimiento se localizan al norte de la cd. de México, en Ecatepec (una región que hasta ahora no ha recibido atención en estudios hidrogeológicos) resultado de la extracción realizada por pozos que originalmente fueron perforados de forma temporal para aliviar el

Received: 5 October 2006 / Accepted: 5 May 2007
Published online: 18 July 2007

© Springer-Verlag 2007

J. J. Carrera-Hernández (✉) · S. J. Gaskin
Department of Civil Engineering and Applied Mechanics,
McGill University,
817 Sherbrooke Street West, Montreal, QC, H3A 2K6 Canada
e-mail: jaime.carrera@mail.mcgill.ca
Tel.: +43-2236-807499
Fax: +43-2236-71313

J. J. Carrera-Hernández
International Institute for Applied Systems Analysis (IIASA),
Schlossplatz 1, Laxenburg, 2361 Austria

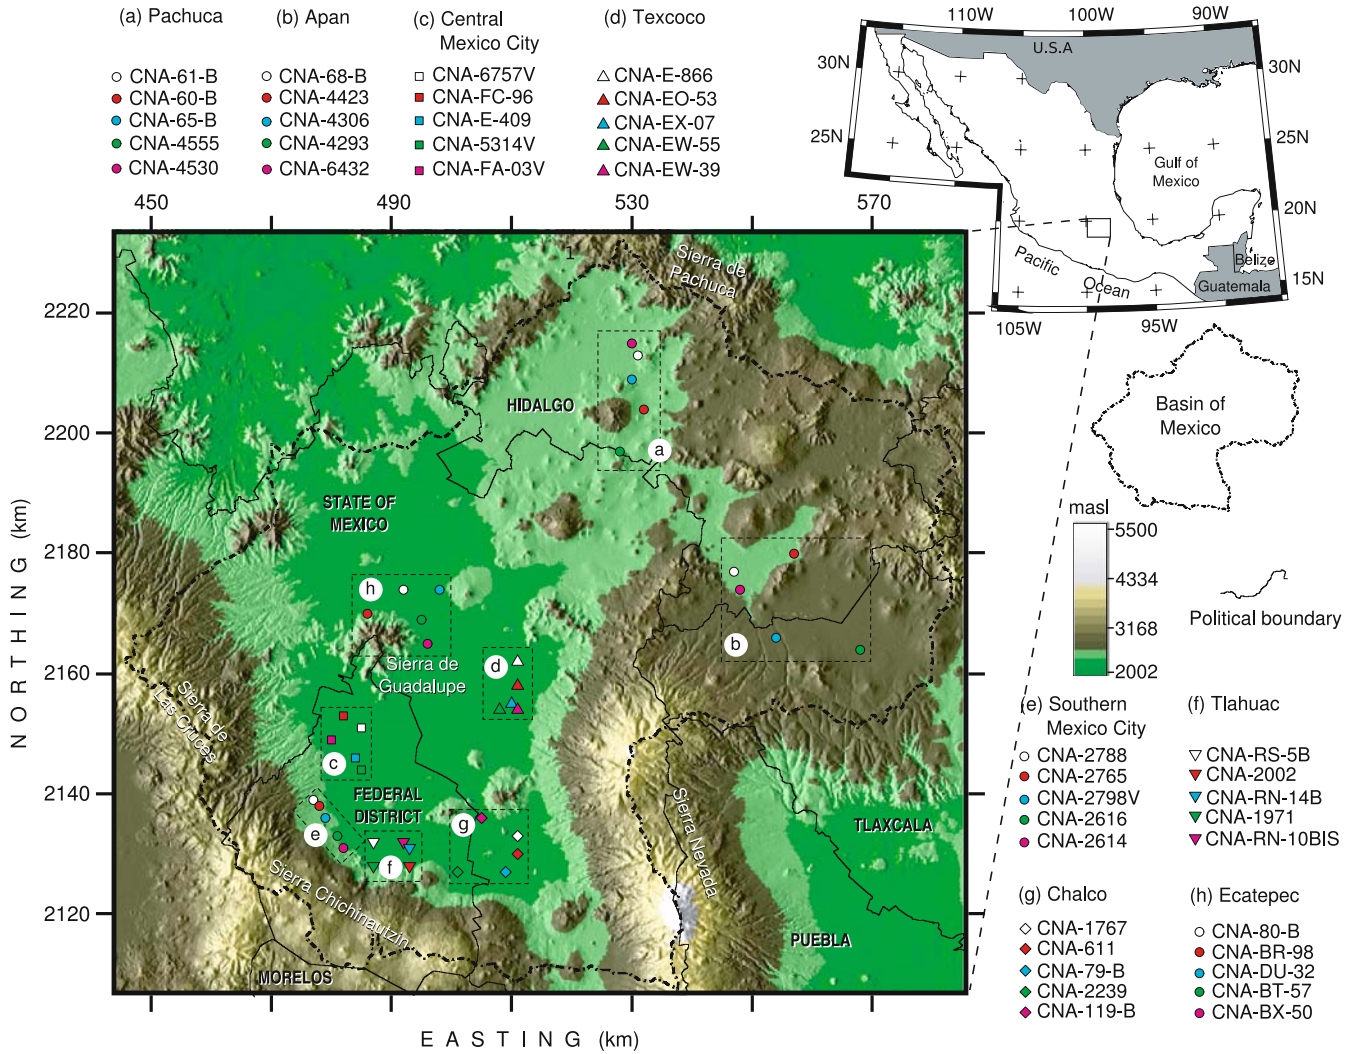


Fig. 1 Location, topography and selected monitoring wells in the Basin of Mexico. The Basin is shown in UTM-14 coordinates. The monitoring wells are used for the long-term analysis of drawdown in six regions. Elevation and shaded relief derived from Shuttle Radar Topography Mission data

problema de suministro de agua a la cd. de México. Es evidente que en algunas areas el acuífero ha cambiado de confinado a libre, lo cual ha causado las altas tasas de subsidencia (40cm/año) en algunas regiones.

Keywords Database · Mexico City · Basin of Mexico · Regional studies · Regional aquifer

Introduction

Groundwater represents the main water source in many regions, including the Basin of Mexico (referred to as the Basin hereafter), on which the Mexico City Metropolitan Zone (MCMZ) and its nearly 20 million inhabitants are located. The Basin’s aquifer system provides nearly 70% of the Basin’s total water supply, while most of the remainder is provided by water from other regions such as

the Cutzamala and Lerma basins located west of the Basin. Despite the importance that the aquifer system plays in the Basin’s water supply, to date no regional studies have been undertaken. A regional approach is needed in order to start managing the Basin’s aquifer system. As a first step to foster a regional approach, a new database called the Basin of Mexico Hydrogeological Database (BMHDB) has been developed by gathering data which were previously available in different locations and formats. In addition, the BMHDB has been developed with Open Source Software in order to make data accessible to people who can not acquire proprietary software due to its cost. Using this approach, the BMHDB has already been used to analyze daily climatological data (rainfall and both minimum and maximum temperature) in the Basin by Carrera-Hernández and Gaskin (2007).

Extraction from the aquifer system has caused a regional drawdown of the groundwater potentiometric

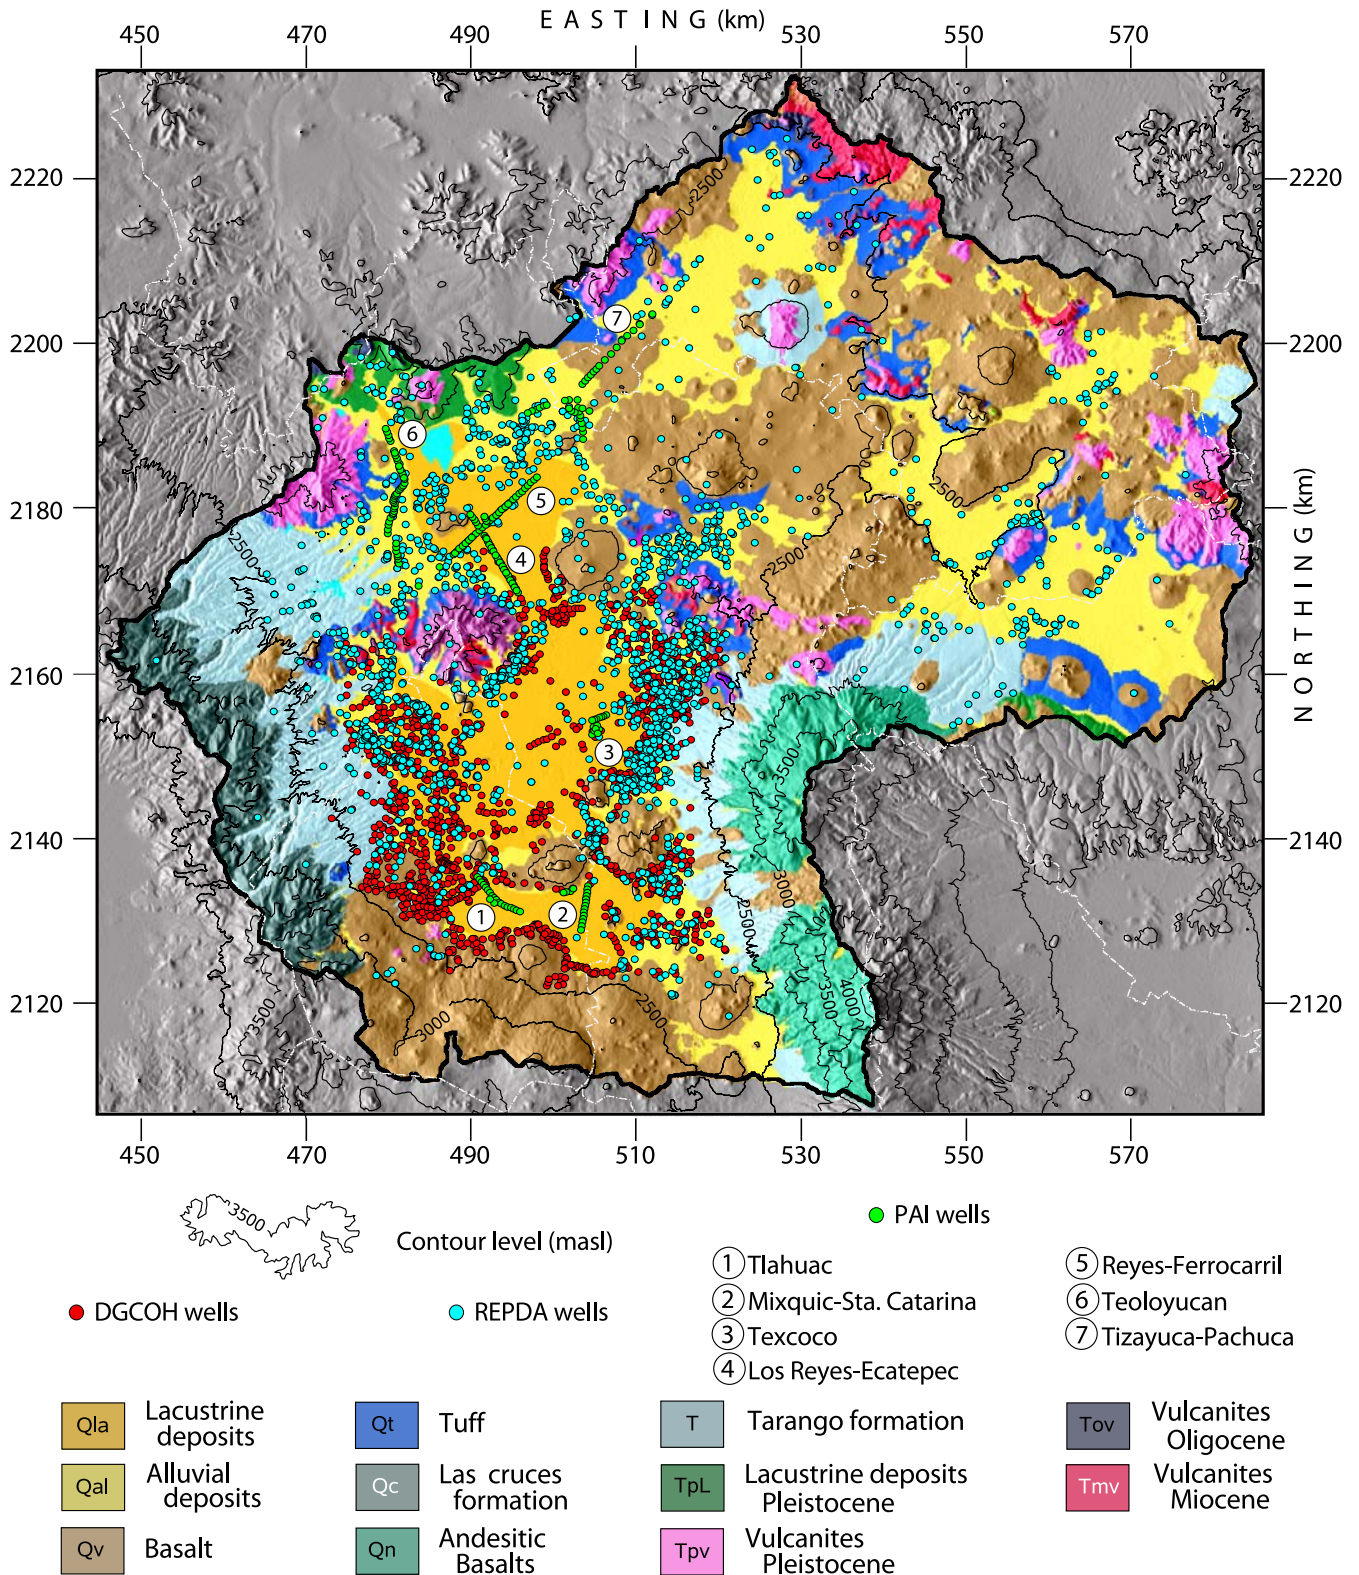


Fig. 2 Surface geology for the Basin of Mexico and extraction wells, which are *color-coded* according to the agency from which data were compiled. Coordinates are in km, UTM zone 14. Geology adapted from Mooser et al. (1996); *shaded relief* derived from Shuttle Radar Topography Mission data

level, which in turn has caused land subsidence due to the compressible nature of the lacustrine sediments that overlie most of the regional aquifer system. To this date, most studies have focused on the area on which the MCMZ is located, ignoring other areas which exhibit drawdown rates of almost 3 m/year and which may have similar or larger subsidence rates than those of Chalco and Texcoco (see Fig. 1), the focus of previous studies. In order to change the existing piece-wise aquifer approach, this work analyzes the spatial evolution of the regional groundwater potentiometric level in the Basin from 1975 to 2000 in six time steps using data on the spatial distribution of extraction rates and lithology data which are part of the BMHDB. This approach shows how the aquitard's thickness changes within the Basin and how, in some areas, the aquifer is no longer confined.

The Basin of Mexico

The Basin of Mexico, with an approximate area of 9,600 km², encloses one of the largest cities in the world: Mexico City and its Metropolitan Zone (MCMZ). The Basin is located in the central part of Mexico between the meridians 99°30'W, 98°10'W and the parallels 19°10'N, 20°10'N; it has a mean altitude of 2,240 meters above sea level (masl) and is enclosed by mountains as high as 5,500 masl (Fig. 1).

The Basin's aquifer system exploitation started in 1847, when the first well was drilled (Ortega and Farvolden 1989). By 1899, a total of 1,070 wells were used to extract water from the aquifers (Marroquin-Rivera 1914), a number that increased throughout the last century. Water extraction from the aquifer in 1950 was 13.7 m³/s, while water imported from the Lerma basin accounted for 6.0 m³/s (Mazari and Alberro 1990). By 1990, a total of 3,537 officially registered wells were located in the MCMZ (NRC 1995). Exploitation of the aquifer system in the Basin has caused land-subsidence problems. From the beginning of the twentieth century until 1938, the land subsidence rate was 4.6 cm/year and increased in the following decade to 16 cm/year (NRC 1995). By this time, authorities realized that water pumping was the main cause of land subsidence in the city and closed the wells located in the center of the city. With this policy, land subsidence rate went down to 7.5 cm/year and by the end of the 1980s its mean value was 4.5 cm/year (Mazari and Alberro 1990). Net subsidence over the last century has lowered the central part of the urban area more than 7.5 m (NRC 1995; Figueroa-Vega 1984) while in Azcapotzalco, its value is up to 30 m (Birkle et al. 1998).

Compounding this problem, the Basin comprises five political entities: the Federal District, State of Mexico, Hidalgo, Puebla and Tlaxcala (Fig. 1); accordingly, different governmental agencies are in charge of water supply, the most important being the *Comisión Nacional del Agua* (CNA) and the *Dirección General de Construcción y Operación Hidráulica* (DGCOH). The CNA

has under its charge the *Gerencia Regional de Aguas del Valle de México* (GRAVAMEX) which in conjunction with the DGCOH operates the water-supply infrastructure for the MCMZ. However, water management at the basin level is not fulfilled as these agencies operate on their own, making it difficult to share information between them.

Hydrogeological setting

The Basin of Mexico has a large aquifer system, as the intense volcanism in this area hinders the existence of isolated aquifers (Mooser and Molina 1993). The surface geology of the Basin (Fig. 2) shows the different geological units in the area, which exhibit different hydraulic properties. The main hydrogeological unit is the Quaternary alluvial unit (Qal) on which the extraction wells are located and which, according to Herrera et al. (1989), is exploited to a maximum depth of 300 m and which reaches a maximum thickness of nearly 800 m in the southern area of the Basin. This main unit is partially covered by Quaternary lacustrine deposits (Qla) which in pre-pumping times confined part of the aquifer system. The Qla unit is thicker in its central areas, reaching a maximum of 300 m in the Chalco sub-basin, located at the SE region of the Basin, while its minimum value (30 m) is found towards the north and on the plain's limits (Vázquez-Sánchez and Jaimes-Palomera 1989). Within this unit, a sand unit is located and generally referred to as *capas duras* which has large hydraulic conductivity values and a thickness of nearly 3 m. The Qal unit is interlayered with the Quaternary basalts (Qv) of the Sierra Chichinautzin and other volcanoes in the southern region of the Basin. The Quaternary basalts have large permeability values due to their large number of fractures, thus providing an adequate route for aquifer recharge. The high mountains that limit the Basin to the east are formed by andesitic basalts (Qn), which lie above the Tarango formation (T), also found at the bottom of the Sierra de las Cruces and are comprised of tuff, pumice and lahar (Mooser and Molina 1993). These units are limited by the Pliocene lacustrine deposits (Pl) which consist of highly consolidated clays (Mooser and Molina 1993).

The need for accessible and up-to-date data at the Basin level is shown from recent studies undertaken within or near the Basin. These studies considered only subareas of the Basin or relied on short-term records. Studies that have used limited rainfall data to compute the mean rainfall value of the Basin include Birkle et al. (1998), who developed a "long-term" water balance for the study area using rainfall data for the 1980–1985 period. Downs et al. (2000) relied on previous studies such as the one by Ramirez-Sama (1990), who used data from 1930–1970. Studies focusing on particular sub-regions of the Basin include Huizar-Alvarez et al. (2003), who studied the Pachuca-Zumpango sub-basin and Huizar-Álvarez et al. (2001), who analyzed the Tecocomulco region located in the northeastern part of the Basin with an area of 585 km².

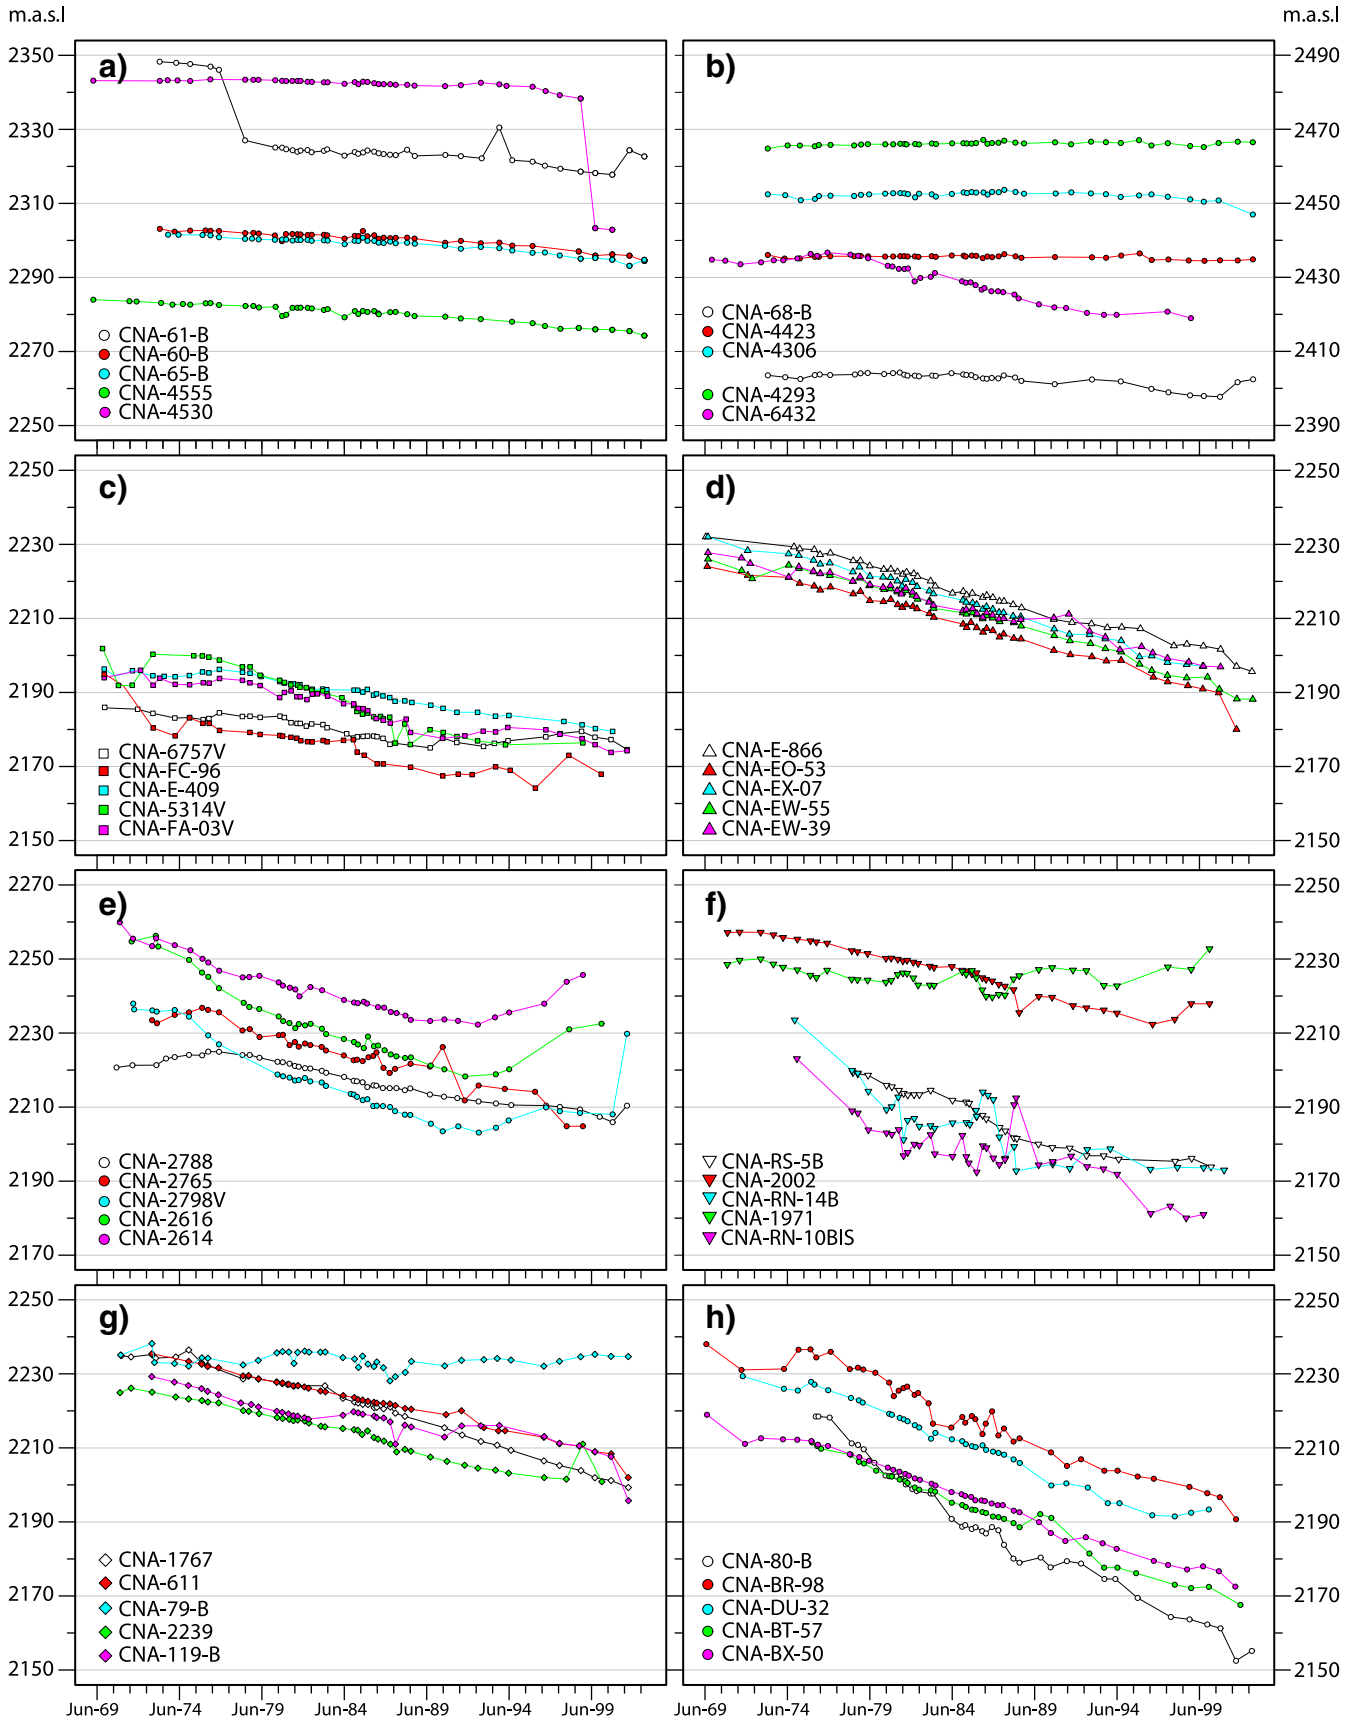


Fig. 3 Evolution of the groundwater level elevation for 40 wells distributed in different areas in the Basin as shown in Fig. 1: **a** Pachuca, **b** Apan, **c** Central Mexico City, **d** Texcoco, **e** southern Mexico City, **f** Tláhuac, **g** Chalco and **h** Ecatepec

The Basin of Mexico hydrogeological database

Data required for any type of surface or groundwater study in the Basin are currently spread throughout different agencies in charge of water supply; and, within these agencies, data are found in different reports. Furthermore, the existing databases are limited to particular data such as climatological data or run-off data. In order to improve water management in the Basin and to foster an integrated water management approach in the study area, the BMHDB has been developed using both a relational database management system (RDBMS) and a geographic information system (GIS). The BMHDB comprises monitoring wells from both CNA and DGCOH, and extraction wells registered at the *Registro Público de Derechos de Agua* (REPDa), DGCOH and other wells such as the *Pozos de Acción Inmediata* (PAI), as shown in Fig. 2. In addition, lithology records, pumping tests and chemical data are available for some extraction boreholes. Climatological data such as rainfall, temperature and pan evaporation are available. In order to build this database, the authors gathered this information which is currently distributed in the water-supply agencies (DGCOH, CNA), in previous studies realized in sub-areas of the Basin and existing databases. The information gathered to date was obtained in different formats such as spreadsheet files, vector files, hard-copy maps (e.g. soils and land-use), hand written tables and reports. This information was processed and geo-referenced in order to provide readily accessible data for hydrogeological modeling.

Database structure

The BMHDB contains both spatial and point data. Spatial data such as soil units, surface geology and topography are stored in the GRASS GIS as raster maps, while point data such as those recorded at wells and both climatological and gauging stations are stored in relational tables. The point data stored in the BMHDB comprises 18 different tables which are grouped in three sub-databases: climatological records, well and run-off data. In order to ease the maintenance of well data, the well identifiers (ID) are preceded by a prefix (e.g. CNA, DGOCH) which reflects the agency from where data were gathered and which also avoids duplication. The BMHDB is a relational database, which means that different tables are related to each other by a unique identifier which in the case of well data, is the well's id. The well database comprises nine tables of which one is the main table which has general data such as the well's id, coordinates, name, elevation, total depth and diameter; the information stored in this main table can be expanded depending on the general data available. The remaining eight well-related data tables, which are related to the main table by the well's id, are lithology, metals, pumping test data, chemical data, groundwater level, extraction rates and screen depths; unfortunately these data tables are not available for all wells, but the structure of the database

allows for easy updating and addition of more data as they become available. The database is accessed through standard query language (SQL) commands and statistical analysis can be undertaken through the R statistical package (R Development Core Team 2005) and its libraries such as GSTAT (Pebesma 2004) for geostatistical analysis. The database was designed in a way that facilitates adding new records as they become available and can be easily implemented in other regions where, depending on the available data, the tables can have more or less information.

Evolution of the potentiometric level in the Basin

The BMHDB was used to analyze the evolution of the potentiometric level in the Basin in order to analyze the effect that groundwater extraction has caused on aquifer conditions. It should be stressed that this analysis would have been limited both geographically and temporally if the BMHDB had not been developed. The DGCOH started the development of a monitoring piezometric network in the southern part of the Basin in 1984 (DGCOH and Lesser 1991), which complements the long-term data from the CNA's monitoring wells, as some of the CNA wells have data from 1969. In this way, the monitoring network is enriched by the density of the DGCOH wells in the southern area of the Basin and the long-term data from the CNA wells, which are distributed throughout the Basin.

As illustrated in Fig. 3, which shows the potentiometric groundwater level for 1969–2002 recorded at 40 monitoring wells located in eight different regions in the Basin (Fig. 1), the drawdown rate varies across the Basin. In general, all wells show that the potentiometric groundwater level in the Basin is decreasing, except in Apan located in the eastern part of the Basin (Fig. 1). The level recorded in the four wells located in this area is almost constant, except for well CNA-6432 (Fig. 3b) found in the city of Apan. The largest drawdown rates in the Basin are found in the Ecatepec area just north of Federal District, (Fig. 1) as the level recorded in Ecatepec at well CNA-80-B (Fig. 3h) shows a total drawdown of nearly 70 m for the period 1975–2002. It is interesting to note the evolution of the potentiometric level in southern Mexico City (Fig. 3e). A continuous drawdown occurs from 1969 to 1992, then the potentiometric level starts to rise in three of the wells located in this area, which may have been caused by a reduction in the extraction rates. A similar behavior is observed in Tláhuac (Fig. 3f) in those wells located at a similar elevation to those of the previous region at approximately 2,300 masl (Fig. 1).

The spatial analysis of the evolution of the potentiometric elevation between 1975–2000 was undertaken for six time steps: 1975, 1980, 1985, 1990, 1994 and 2000 as illustrated in Fig. 4, which was developed by using GSTAT (Pebesma 2004) within R (R Development Core Team 2005) and written as different GRASS raster files by

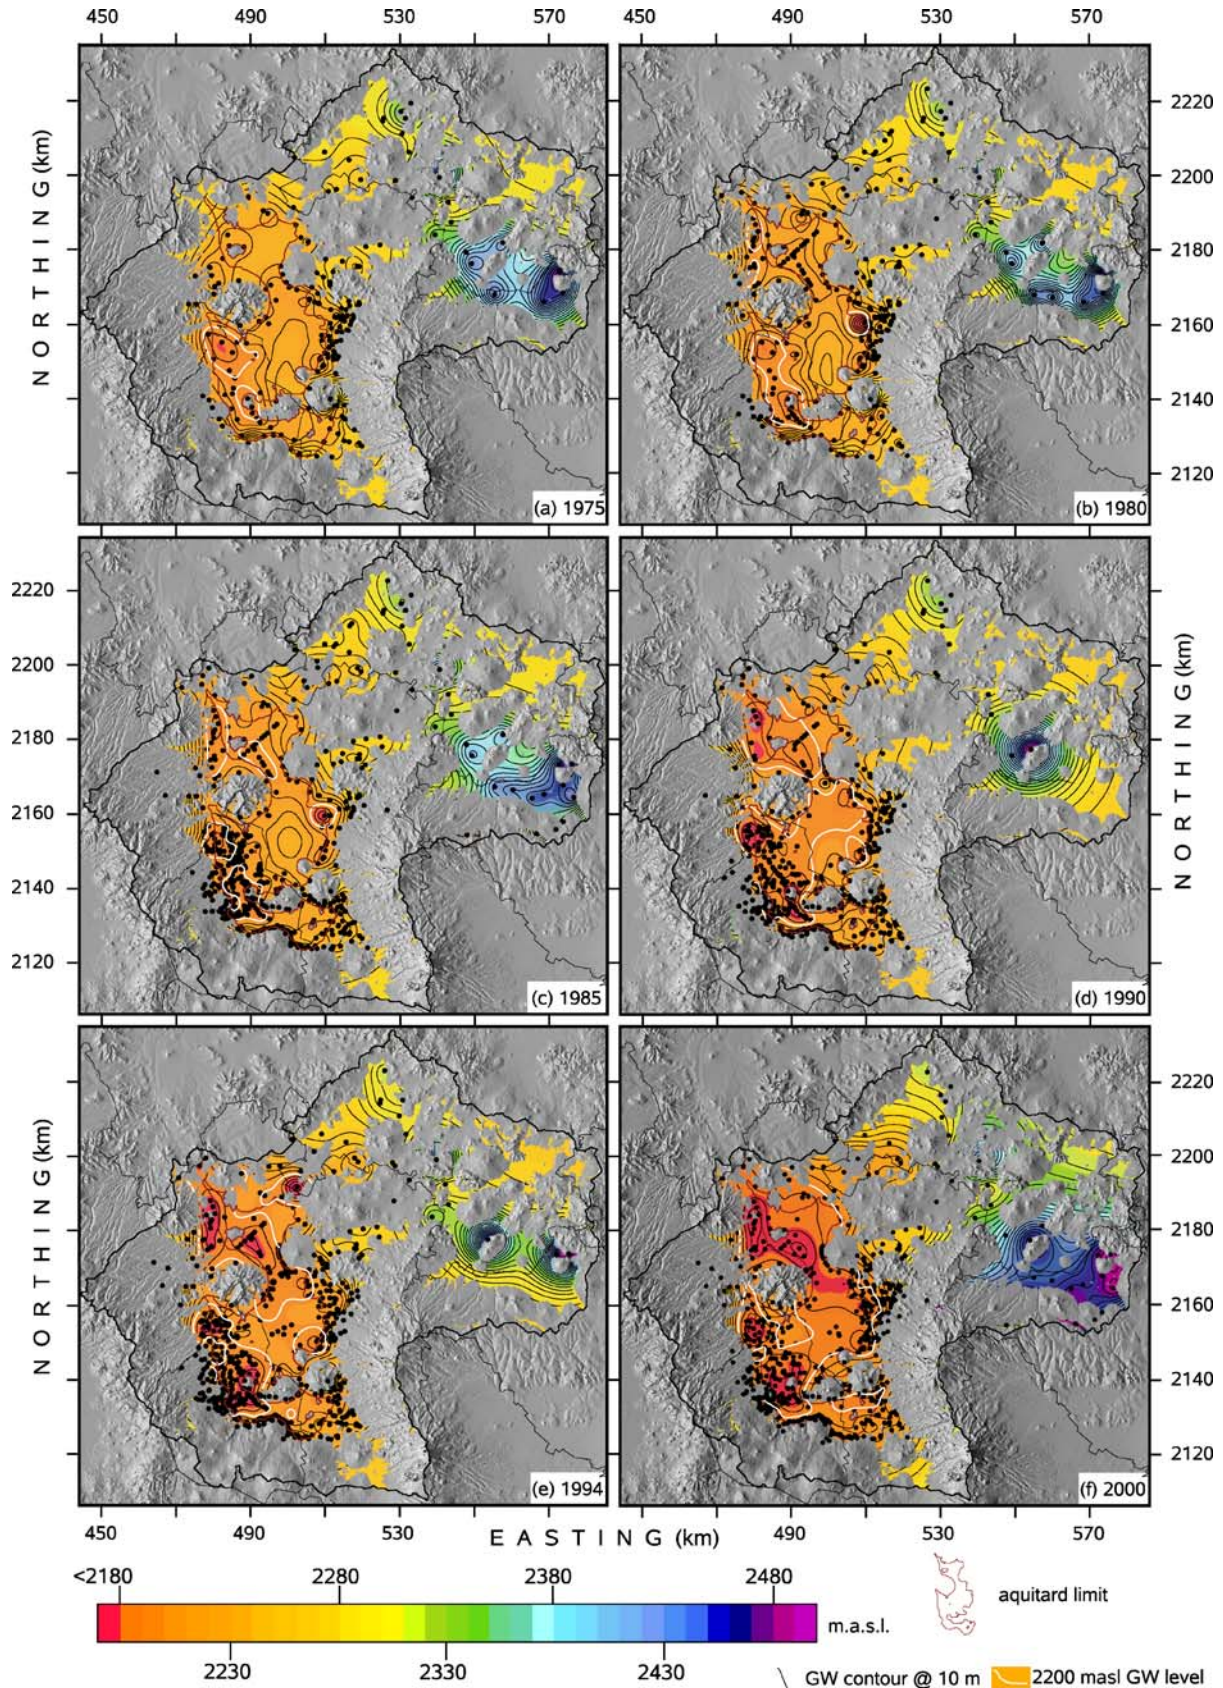


Fig. 4 Elevation in meters above sea level (masl) of the groundwater level (GW) for years 1975–2000. *Black dots* represent the monitoring wells used to undertake the spatial interpolation while *black lines* represent elevation at every 10 meters. The *white contour line* represents 2,200 masl. Coordinates are in km, UTM reference system, zone 14

using R's library *spgrass* (Bivand 2000). The contour lines shown on Fig. 4 are limited to the areal extent of the alluvial sediments (Qal, Fig. 2), in which the white color line represents the potentiometric level of 2,200 masl. In 1975, the 2,200 contour line enclosed a small area in the northern area of the Federal District, near the Sierra de Guadalupe, while for year 2000, the area enclosed by this contour increased to nearly the entire region in the central part of the Basin. For 2000, Fig. 4f shows that the areas with a potentiometric level below 2,180 masl have increased on both Ecatepec and Teoloyucan, while the contour line of 2,200 masl has appeared on Chalco.

The main consequence of the large extraction rates in the Basin is land subsidence, which is not a new problem, as it was discovered by Roberto Gayol in 1925 (Figueroa-Vega 1984). According to Ortega-Guerrero et al. (1999) the Chalco Basin is the area with the largest subsidence rate, with approximately 0.4 m/year. However this rate is also noticed in other areas of the Basin such as in the Texcoco area as shown by Strozzi et al. (2003), who used synthetic aperture radar data to determine land subsidence in the southern part of the Basin. Unfortunately, this study only analyzed land subsidence south of the Sierra de Guadalupe and did not include the areas in which a large depression of the potentiometric level is observed: Teoloyuca, Reyes-Ferrocarril and Ecatepec (Fig. 4). These depression areas are found in those regions where the *Plan de Acción Inmediata* (PAI) wells (Fig. 2) were drilled in the 1970s as a temporary solution to Mexico City's water-supply problem. Although a decline in the potentiometric level in this area can be observed in the early 1970s, an abrupt change is noticeable in 1974 (Fig. 3h), when these wells started to operate. The effect of the PAI wells in the Teoloyucan-Chiconutla area are easily noticed by 1980 (Fig. 4b) when the 2,200 potentiometric contour appears in Teoloyucan and the potentiometric levels are lower in the Los Reyes-Ferrocarril and Los Reyes-Ecatepec areas. In general, the drawdown rate in the Basin is approximately 1 m/year. The largest drawdown rates in the Basin are observed in well CNA-80-B which is located in the Los Reyes-Ecatepec well system and very close to the Los Reyes-Ferrocarril system, with an approximate drawdown rate of 2.5 m/year, while the drawdown rates observed in the other wells in Ecatepec are nearly 1.8 m/year. These rates can be explained by the large pumping rates in this area: in 2003, the Teoloyucan system provided 1.6 m³/s, Los Reyes-Ferrocarril 1.69 m³/s and Los Reyes-Ecatepec 1.27 m³/s (CNA 2004). This contrasts with the extraction rates of the PAI system in the southern area of the Basin: 0.69 m/s in Tláhuac, and 0.60 m/s both in Mixquic and Texcoco (CNA 2004). Following this line of thought, the next section will focus on the analysis of the potentiometric level and the location of pumping wells and their rates using the data in the BMHDB on extraction rates for 1993–1998 for some DGCOH wells, permitted extractions from REPDA wells and extraction rates for 2001–2002 from the PAI wells.

Spatial distribution of pumping rates

The importance of a regional database in the Basin of Mexico is illustrated in Fig. 5, which shows the spatial distribution of pumping rates in the Basin, which are color coded according to the agency from which data were gathered. Additionally, it also shows the groundwater level elevation for 2000 at intervals of 5 m. Before any analysis is made using this figure, it should be pointed out that, as these data are not available, the pumping rates shown for the REPDA wells represent abstraction permits and not actual extraction rates.

The spatial distribution of pumping rates (Fig. 5) shows that large amounts of groundwater are extracted from the aquifer in the southern region of the Basin where the MCMZ is located, and that the REPDA is incomplete, as it is supposed to include all water extraction permits, either ground or surface water (i.e. it should contain data on the DGCOH wells); from Figs. 2 and 5 it can be concluded that this is not the case. None of the wells located at the base of Sierra Chichinautzin are part of the REPDA, nor are many located in the Federal District and near Cerro Barrientos, as shown by the numerous wells indicated by the red dots in Fig. 2. In addition, the extraction rates of the DGCOH are in general larger than the allowed extraction volumes from most of the REPDA wells (Fig. 5). The PAI wells also have large extraction rates, and these wells have caused an impressive drawdown area north of Mexico City in Teoloyucan and Los Reyes due to two PAI well lines located in this area (Fig. 2): Los Reyes-Ecatepec and Los Reyes-Ferrocarril. Although Fig. 5 does not show all the wells of the Tizayuca-Pachuca well line but only the southern most ones, a large drawdown is expected to develop in that region, as was the case in 1994, when the potentiometric level was as low as 2,180 masl (Fig. 4e) and which probably increased due to a change in pumping rates in this area.

Analysis of confinement conditions

The Basin's aquifer system was confined by the lacustrine deposits before pumping started; according to Durazo and Farvolden (1989), the piezometric levels were approximately 2.7 m above the land surface in the mid nineteenth century in the central part of Mexico City and 3–7 m above land surface in Texcoco in 1954. In this study, the spatial distribution of the groundwater level elevation data for 1971, 1980, 1990 and 2000 (Fig. 6) was used together with the lithology data stored in the BMHDB to verify that the aquifer system has changed from confined to unconfined conditions. In order to do this, seven geological cross sections located in different parts of the Basin were used, as illustrated in Fig. 6. In addition to the wells that have lithology information, Fig. 6 also shows the monitoring wells used to illustrate the evolution of the potentiometric groundwater level from 1969–2002 in the previous section (Fig. 3). The identification records of 90 different materials were used to describe the

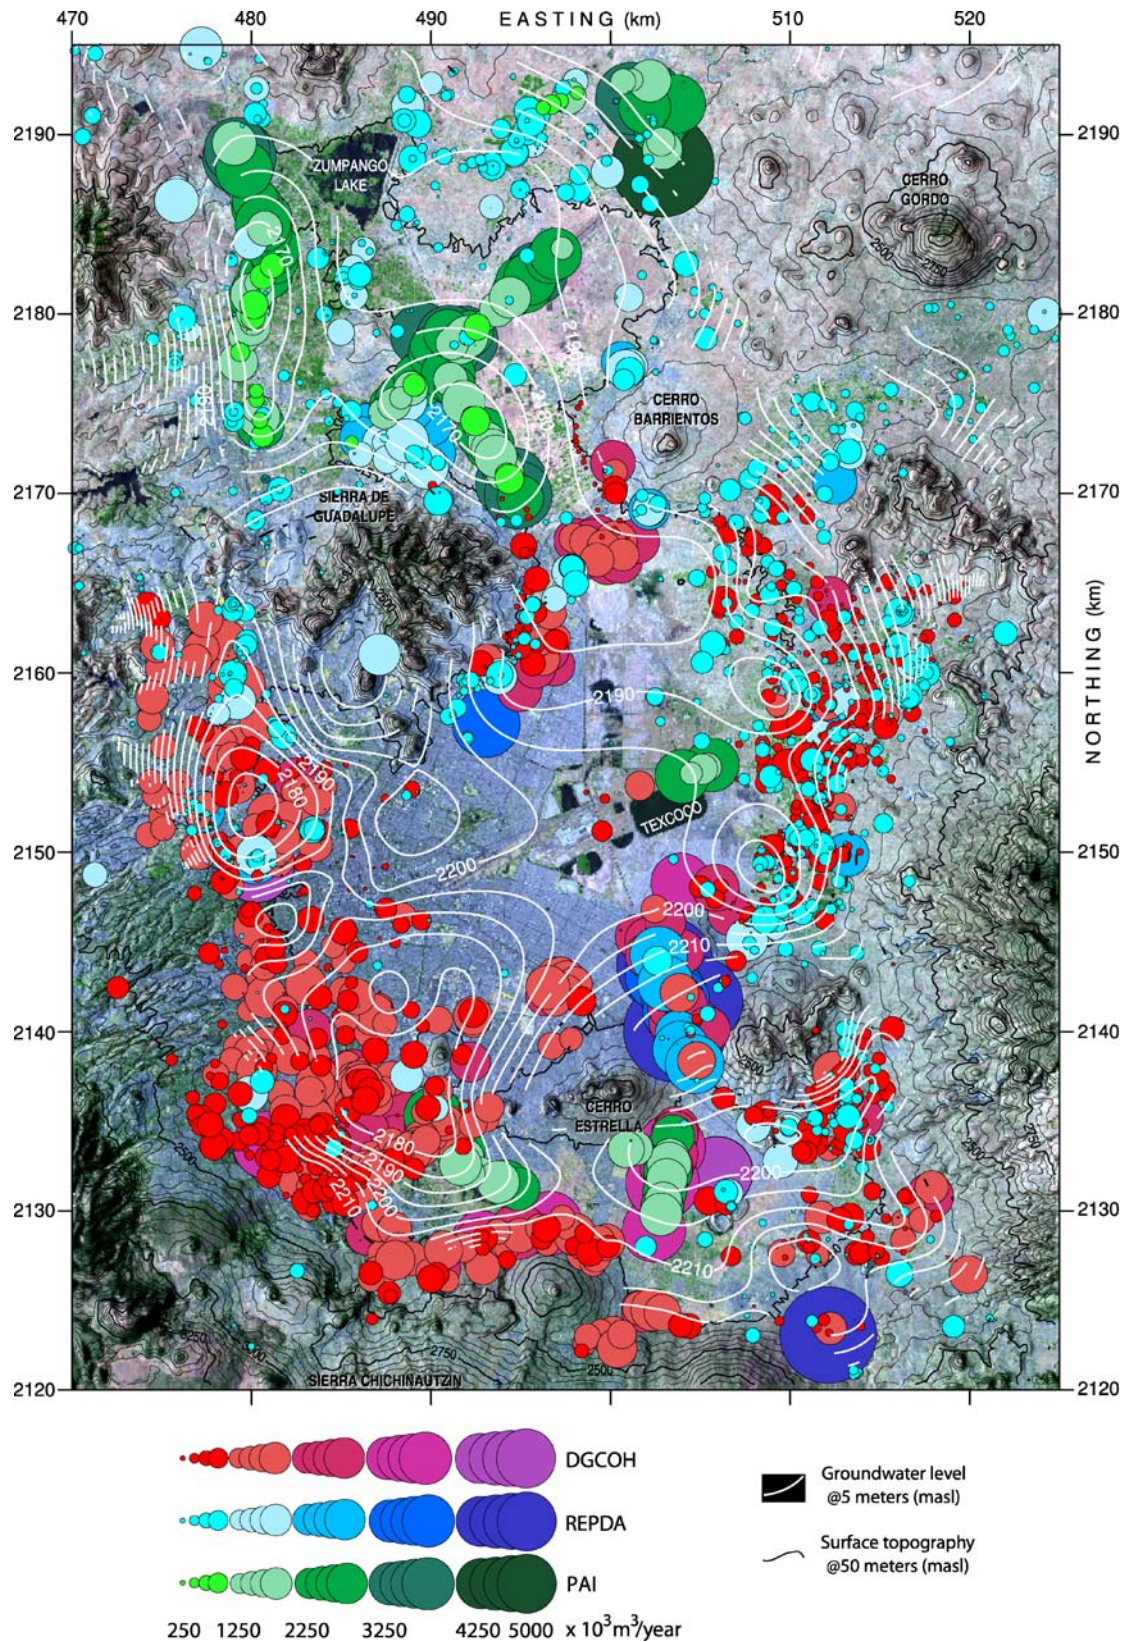


Fig. 5 Spatial distribution of pumping rates in the Basin of Mexico overlying a LANDSAT false color composite showing urban areas in light purple. Red colored circles represent well-data obtained from the DGCOH, blue colored from the REPDA and green colored from PAI wells. The diameter of wells for which the extraction rates are above $5,000 \times 10^3 \text{ m}^3/\text{year}$ are exaggerated to show their location. Although the scale shows a minimum extraction rate of $250 \times 10^3 \text{ m}^3/\text{year}$, several wells have lower rates and appear as dots in the figure. Groundwater level contours are for 2000. Coordinates are in km, UTM reference system, zone 14

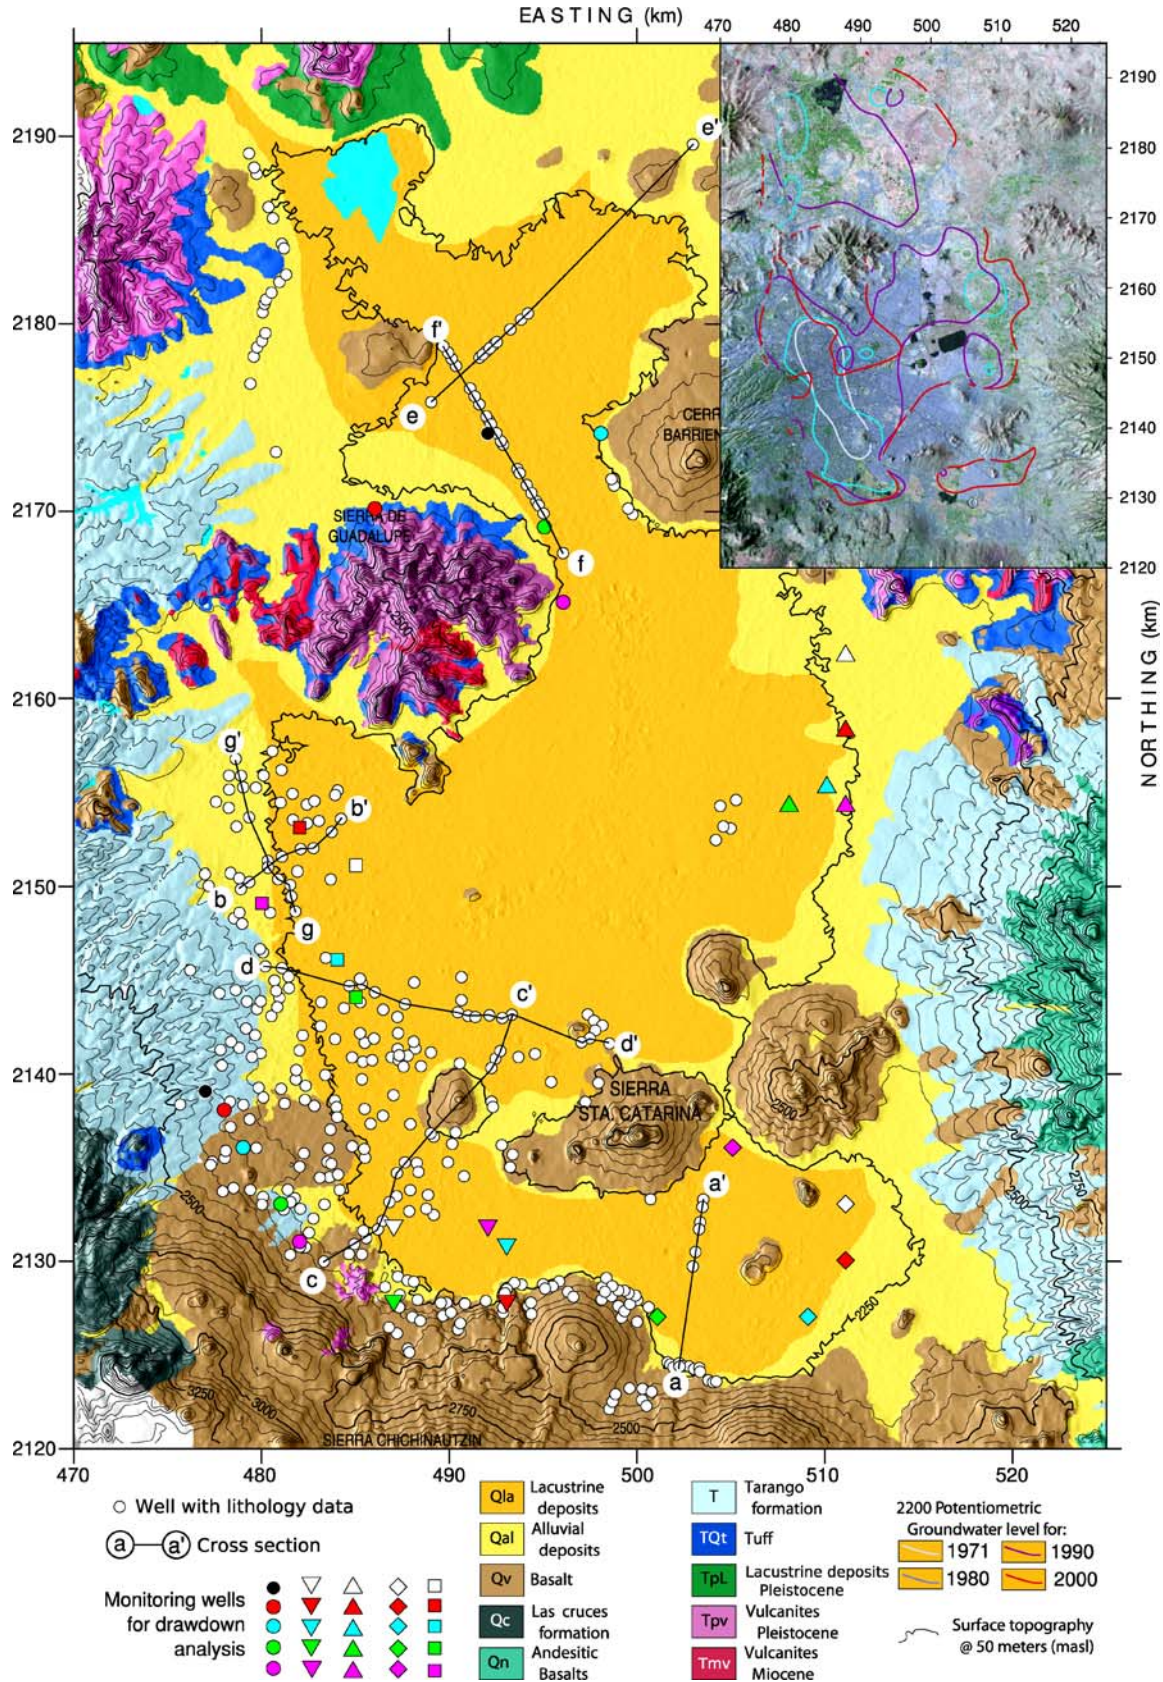


Fig. 6 Wells with lithology data in the Basin of Mexico, and geological cross sections. The inset figure shows the evolution of the 2,200 masl potentiometric level from 1971–2000 for the same area on a LANDSAT false color composite on which urban areas are shown in *light purple*. The figure also shows the monitoring wells used for the drawdown analysis, illustrating the evolution of the potentiometric groundwater level from 1969–2002 (see symbols and color coding in Fig. 3)

















Material	ID	Symbol	Material	ID	Symbol
andesite	1		lapilli	37	
basalt	3		sand	49	
basalt with tezontle	5		sand with clay	51	
breccia	8		sand with gravel	55	
clay	9		sand with silt	61	
clay with sand	15		silt	67	
conglomerate	26		tarango	75	
gravel	25		tuff	81	

Fig. 7 Lithology material and associated identification numbers (*ID*) and symbols

lithology data available in the Basin, but only 16 are used in the present work, as described in Fig. 7, which shows both the ids and symbols used for each lithology material. The colors used in these symbols were chosen in order to match those of the surface geology map (Fig. 2); fine sediments are shown in orange color in order to match the Qla deposits, while coarse sediments are represented in yellow color to match the Qal deposits.

The seven geological cross sections (Fig. 6) were located in different areas in order to analyze the aquifer's confining condition from 1971–2000. The first of these cross sections (a–a') is located in Chalco where, according to Ortega-Guerrero et al. (1993), the lacustrine deposits reach their maximum thickness of nearly 300 m. As shown in this cross section (Fig. 8), artesian conditions were present in 1971 towards the southern and northern limits of the lacustrine deposits in Chalco, which changed near the Sierra Sta. Catarina by 1980 and at both limits of the deposits by 1990. The second cross section (b–b'), located south of the Sierra de Guadalupe, shows that the potentiometric level has remained constant at this section's northern limit, while a drawdown of nearly 50 m is observed at its southern limit (Fig. 9). This is explained by the location of the wells in this area (Fig. 5) as they are

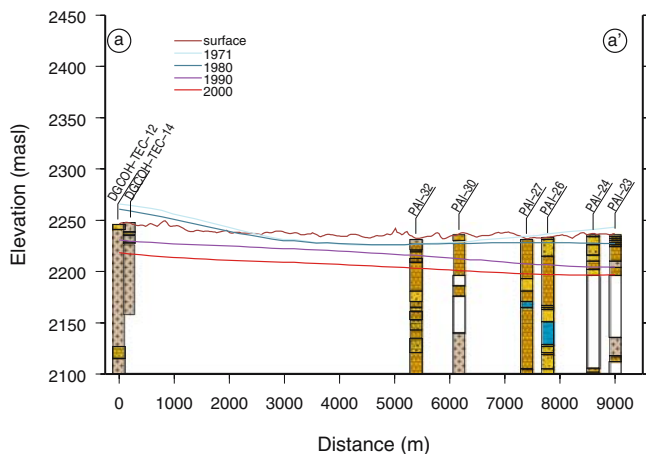


Fig. 8 Geological cross section a–a' in the Basin of Mexico showing the 2,200 masl groundwater level for 1971, 1980, 1990 and 2000. The lithology is explained in Fig. 7, while its location is shown in Fig. 6

located towards the limit of the lacustrine deposits; it is important to notice that the available data show that the aquifer was unconfined even in 1971 in this region; a pattern also observed on cross section g–g' (not shown in detail) on which by 1980 the potentiometric level decreased by nearly 30 m.

The third cross section (c–c', not shown in detail), which starts at the base of the Sierra Chichinautzin, shows how the potentiometric level is lower towards the Cerro de la Estrella both at its southern and northern contacts with the granular aquifer, which is also explained by the large extraction rates in this area (Fig. 5). The geological cross section d–d' (Fig. 10) extends from the base of the Sierra de las Cruces to the north of Sierra de Santa Catarina and shows clearly how the thickness of the lacustrine deposits increases towards the valley's center; it also shows that north of Cerro de la Estrella basalt rocks are found below the lacustrine deposits. This cross section illustrates how the aquifer changes from an unconfined to a confined condition towards the center of the plain and that the potentiometric level increases towards its eastern end. Moving northwards, to where the largest drawdown values are found (Fig. 3), section e–e' (Fig. 11) extends across the Reyes-Ferrocarril well line; and it is interesting to note the drastic change in the potentiometric level from 1971 to 1980, which was caused by the fact that these PAI wells started to operate in 1974. As shown in this cross section, the potentiometric level has maintained a constant decrease rate which, according to Fig. 5, is caused by the PAI wells; the remaining wells in this area have low extraction rates. The same pattern is observed in section f–f' (not shown in detail) on which the lacustrine sediments are intercalated with coarse deposits and tuff towards the section's northern limit. From these two sections, it appears that the aquifer is still confined in this region.

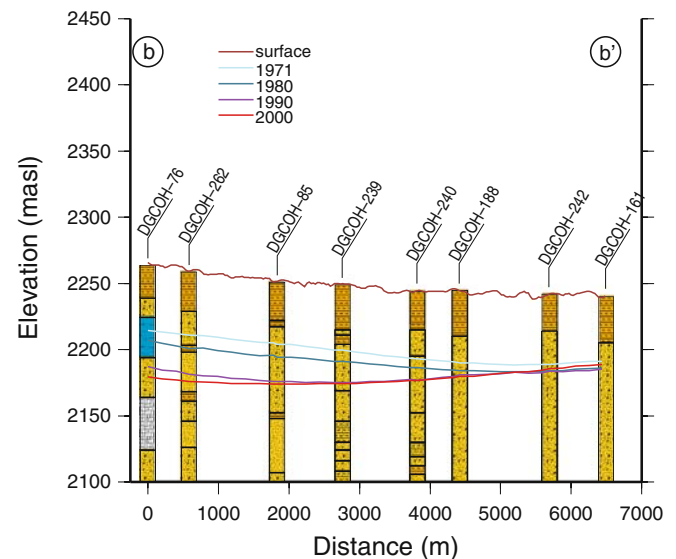


Fig. 9 Geological cross section b–b' in the Basin of Mexico showing the 2,200 masl groundwater level for 1971, 1980, 1990 and 2000. The lithology is explained in Fig. 7, while its location is shown in Fig. 6

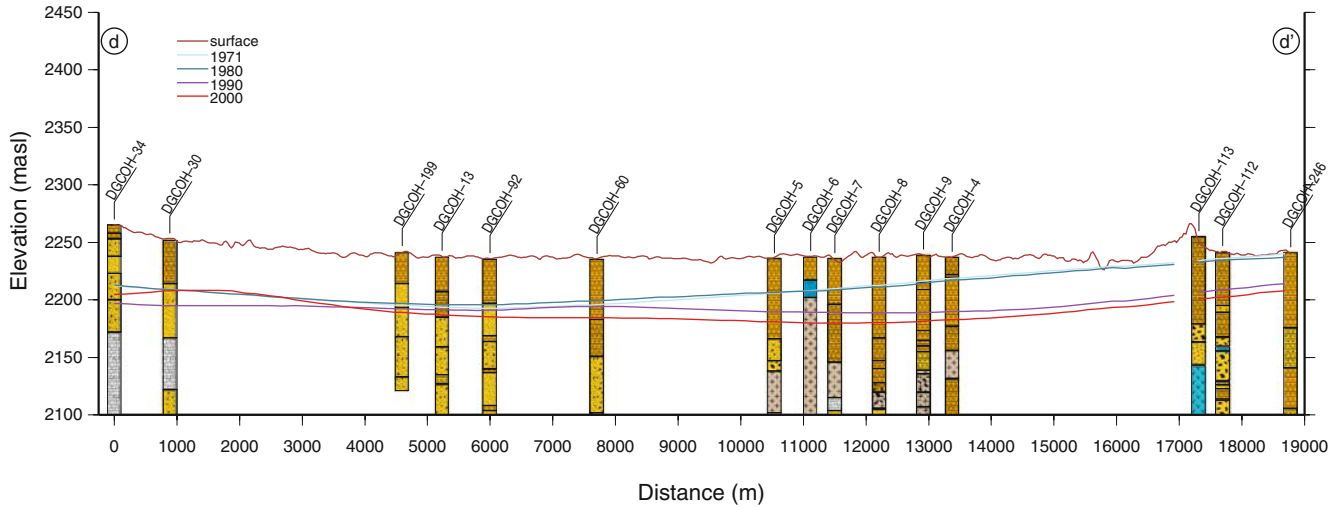


Fig. 10 Geological cross section d-d' in the Basin of Mexico showing the 2,200 masl groundwater level for 1971, 1980, 1990 and 2000. The lithology is explained in Fig. 7, while its location is shown in Fig. 6

Discussion

The Basin of Mexico encloses not only Mexico City and its metropolitan zone (MCMZ), but other urban areas as well. Evidently, the size and importance of the MCMZ has triggered the development of studies in the area covered by it, but this has led to a misleading approach because the aquifer from which water is extracted in the MCMZ is part of a regional aquifer system, a fact that has not been taken into consideration. The BMHDB provides readily accessible data, as its data can be used directly to develop groundwater flow models through the use of the *rgmtg* module (Carrera-Hernández and Gaskin 2006) in the GRASS GIS, directly using GRASS data files in MODFLOW, avoiding the process of importing and exporting data from a GIS to a graphic user interface (GUI) of a groundwater-flow modelling software. It should be mentioned that data stored in the BMHDB comprises officially registered wells; however, non-registered wells exist

throughout the Basin. This adds another uncertainty factor to be considered when groundwater flow modeling is undertaken. Some information such as the wells' coordinates, was verified with existing maps when available or by locating them on a map and checking if their location corresponded to that stored in the database.

The geological cross sections used in this work show that artesian conditions were only found in Chalco in the early 1970s (cross section a-a', Fig. 8), a condition that is not present anymore. The Basin's lowest region was a groundwater discharge zone (Durazo and Farvolden 1989); accordingly, the aquifer was confined by the lacustrine deposits, a situation that is currently present in two areas: in the Chalco region, in which these deposits reach a maximum thickness of 300 m, and north of Cerro de la Estrella. In certain parts of the Basin such as central Mexico City and Ecatepec, an abrupt decrease of the potentiometric level is found from 1971 to 1980. In Ecatepec, this change is more acute and caused by the PAI

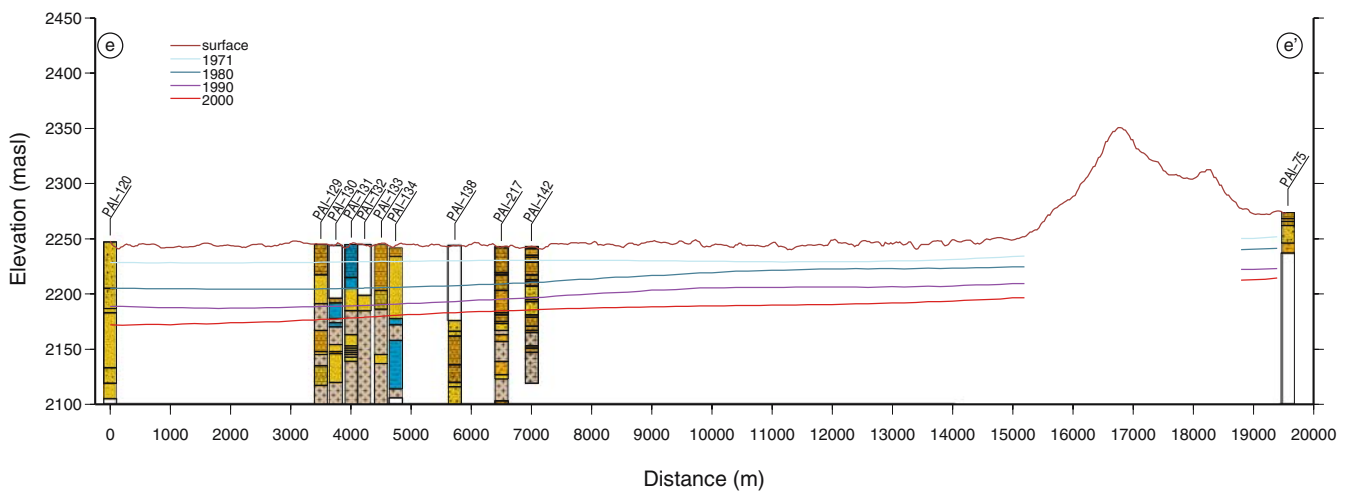


Fig. 11 Geological cross section e-e' in the Basin of Mexico showing the 2,200 masl groundwater level for 1971, 1980, 1990 and 2000. The lithology is explained in Fig. 7, while its location is shown in Fig. 6

line wells, which started to extract water in 1974 as a “temporary” solution to Mexico City’s water-supply problem, but which to this date, continue to operate.

The spatial distribution of the potentiometric groundwater level in the Basin shows that more studies are needed in the northern areas of the Basin and not only on the region where the MCMZ is located or in the Chalco area as has previously been done: Rivera and Ledoux (1991) used a finite difference method to study land subsidence caused by aquifer pumping in the central part of the Basin; Huizar-Álvarez (1993) developed a finite difference model of groundwater flow for the Chalco-Amecameca area, located in the southeastern part of the Basin. The DGCOH (1994) used another numerical model for an area enclosing part of the Federal District and the State of Mexico. This same government agency (DGCOH 2001) used another model in order to refine a previous numerical model (DGCOH 1999) which was used for the Federal District area. The only study north of the Sierra de Guadalupe is the one by Huizar-Álvarez et al. (2003) which developed a finite difference model to simulate groundwater flow in the Pachuca-Zumpango sub-basin; none of these studies have considered a regional aquifer system.

The drawdown rate in the Basin is in general around 1 m/year, but some areas which have not yet been incorporated in previous studies have drawdown rates as large as 2.5 m/year. In addition, the use of constant head boundaries in previous studies may lead to wrong results as the potentiometric level in the Basin is in constant evolution (Figs. 4 and 6) and new studies should consider an aquifer system instead of an isolated set of aquifers as has previously been done; a task that is facilitated by the use of the BMHDB shown in this work.

Future studies in the Basin of Mexico need to consider the presence of a regional aquifer system; in addition, an integrated water management approach is also needed in order to consider the effect that urban growth has had and will have on aquifer recharge in this area. Although the main recharge areas of the aquifer system are the mountains that surround the Basin, precipitation can also recharge the aquifer by infiltrating through the Qal deposits (Fig. 2), a phenomenon that cannot occur any longer once the urban area covers the areas in which this happens. This is an issue that needs to be considered in any water management plan in the Basin.

Conclusions

The Basin of Mexico encloses Mexico City and its metropolitan zone (MCMZ), one of the largest cities in the world which extends over two different political units. This has led to the development of hydrogeological studies which have focused on the southern part of the Basin where the MCMZ is located.

The drawdown rate in the Basin is in general 1 m/year; however in Apan, in the eastern zone of the Basin, the drawdown rate is almost negligible, except for one well

located in the city of Apan. This drawdown rate contrasts with the nearly 3-m/year rate recorded in Ecatepec. By considering a regional system, this work shows that the largest drawdown rates are actually north of the MCMZ. In addition, this work has shown that although the aquifer is still confined in some parts, it is not the case towards the limits of the lacustrine deposits.

The approach taken so far, in which an isolated set of aquifers has been considered, needs to be changed to a regional approach, in which an aquifer system in the Basin has to be considered.

Acknowledgements Financial support from both Mexico’s National Science and Technology Council (CONACyT) and the National Science and Engineering Research Council of Canada (NSERC) is acknowledged. We thank both the DGCOH and CNA for allowing access to their records.

References

- Birkle P, Torres-Rodríguez V, González-Partida E (1998) The water balance for the Basin of the Valley of Mexico and implications for future water consumption. *Hydrogeol J* 6:500–517
- Bivand RS (2000) Using the R statistical data analysis language on GRASS 5.0 GIS database files. *Comput Geosci* 26:1043–1052
- Carrera-Hernández JJ, Gaskin SJ (2006) The groundwater modeling tool for GRASS (GMTG): open source groundwater flow modeling. *Comput Geosci* 32:339–351
- Carrera-Hernández JJ, Gaskin SJ (2007) Spatio temporal analysis of daily precipitation and temperature in the Basin of Mexico. *J Hydrol* 336(3–4):231–249, DOI 10.1016/j.jhydrol.2006.12.021
- CNA (2004) Compendio del agua de la región XIII: Aguas del Valle de México y Sistema Cutzamala 2004 [Region XIII water compendium: water in the Valley of Mexico and Cutzamala System, 2004]. <http://www.cna.gob.mx/eCNA/Espaniol/Regionales/Gravamex/Publicaciones/compendio.htm>. Cited 12 May 2007
- DGCOH (1994) Diagnostico del estado presente de las aguas subterráneas de la ciudad de México y determinación de sus condiciones futuras [Diagnosis of the present state of groundwater in Mexico City and its future condition]. Technical report, Instituto de Geofísica, UNAM, Mexico City
- DGCOH (1999) Estudio para actualizar la base de datos de la modelación del acuífero y simulación mediante modelos matemáticos aplicando diferentes políticas de explotación en el Distrito Federal [Study for the updating of the aquifer database and mathematical simulation of different extraction policies in the Federal District]. Technical report, DITAPSA Consultores, S.A. de CV, Mexico City
- DGCOH (2001) Evaluación y análisis de perspectivas para el abastecimiento de agua al distrito federal [Evaluation and analysis of different water supplies for the federal district]. Technical report, Instituto Mexicano del Petróleo, Universidad Nacional Autónoma de México, Battelle Memorial Institute and Universidad Autónoma Metropolitana, Iztapala, Mexico
- DGCOH and Lesser y asociados (1991) Recarga artificial de agua residual tratada al acuífero del Valle de México (Artificial aquifer recharge with wastewater in the Basin of Mexico). *Ing Hidrául Méx* 6(2):65–70
- Downs TT, Mazari-Hiriart M, Domínguez-Mora R, Suffet IH (2000) Sustainability of least cost policies for meeting Mexico City’s future water demand. *Water Resour Res* 36(8):2321–2339
- Durazo J, Folvolden R (1989) The groundwater regime of the Valley of Mexico from historic evidence and field observations. *J Hydrol* 112:171–190
- Figueroa-Vega G (1984) Case story no. 9.8. México, D. F., México. In: Guidebook to studies of land subsidence due to groundwater withdrawal. UNESCO, Paris

- Herrera I, Martínez R, Hernández G (1989) Contribución para la administración científica del agua subterránea de la Cuenca de México [Contribution for the scientific management of groundwater in the Basin of Mexico]. *Geofis Int* 28(2):297–334
- Huizar-Álvarez R (1993) Simulación matemática del sistema acuífero de Chalco-Amecameca, México [Mathematical modeling of the Chalco-Amecameca aquifer system]. *Geofis Int* 32(1):57–79
- Huizar-Álvarez R, Campos-Enriquez O, Miltre-Salazar LM, Alatríste-Vilchis D, Méndez-García T, Juárez-Sánchez F (2001) Evaluación hidrogeológica de la subcuenca de Tecocomulco, Estados de Hidalgo, Puebla y Tlaxcala, México [Hydrogeological evaluation of the Tecocomulco sub-basin, states of Hidalgo, Puebla and Tlaxcala, Mexico]. *Rev Mex Cienc Geol* 18(1):55–73
- Huizar-Álvarez R, Hernández G, Carrillo-Martínez M, Carrillo-Rivera JJ, Hergt T, Angeles G (2003) Geologic structure and groundwater flow in the Pachuca-Zumpango sub-basin, central Mexico. *Environ Geol* 43(4):385–399
- Marroquin-Rivera J (1914) Memoria de las obras de aprovisionamiento de agua potable a la ciudad de México [Memory of the water supply works for Mexico City]. Impresora Müller hermanos, Mexico City
- Mazari M, Alberro J (1990) Hundimiento de la ciudad de México [The sinking of Mexico City]. In: *Problemas de la Cuenca de México* [Problems in the Basin of Mexico]. El Colegio de México, Mexico City, pp 83–114
- Mooser F, Molina C (1993) Nuevo modelo hidrogeológico para la Cuenca de México [New hydrogeological model for the Basin of Mexico]. *Bol centro invest sismic Fundacion Barros Sierra* 3(1):68–48
- Mooser R, Montiel A, Zúñiga A (1996) Nuevo mapa geológico de las cuencas de México, Toluca y Puebla. *Estratigrafía tectónica regional y aspectos geotérmicos* [New geological map for the Basins of Mexico, Toluca and Puebla]. Comisión Federal de Electricidad, Mexico City
- NRC (1995) Mexico City's water supply: improving the outlook for sustainability. National Academy of Sciences, Washington, DC
- Ortega A, Farvolden RN (1989) Computer analysis of regional groundwater flow and boundary conditions in the basin of Mexico. *J Hydrol* 110:271–294
- Ortega-Guerrero A, Cherry JA, Rudolph DL (1993) Large-scale aquitard consolidation near Mexico City. *Ground Water* 31(5):708–718
- Ortega-Guerrero A, Rudolph DL, Cherry JA (1999) Analysis of long term land subsidence near Mexico City: field investigations and predictive modeling. *Water Resour Res* 35:3317–3341
- Pebesma EJ (2004) Multivariable geostatistics in S: the gstat package. *Comput Geosci* 30:683–691
- R Development Core Team (2005) R: a language and environment for statistical computing. R Foundation for Statistical Computing, Vienna, Austria, ISBN 3-900051-07-0
- Ramírez-Sama C (1990) El agua en la Cuenca de México [Water in the Basin of Mexico]. In: *Problemas de la cuenca del Valle de México*, [Problems in the Basin of Mexico], El Colegio de México, Mexico City, 61–80 pp
- Rivera A, Ledoux E (1991) Nonlinear modeling of groundwater flow and total subsidence of the Mexico City aquifer aquitard system. In: *Proceedings of the fourth international symposium on land subsidence*, May 1991, Publ. no. 200, IAHS, Wallingford, UK
- Strozzi T, Wegmüller U, Werner CL, Wiesman A, Spreckels V (2003) JERS SAR interferometry for land subsidence monitoring. *IEEE Trans Geosci Remote Sens* 41:1702–1708
- Vázquez-Sánchez E, Jaimes-Palomera R (1989) Geología de la cuenca de México [Geology of the Basin of Mexico]. *Geofis Int* 28(2):133–190